


THE TALLMAX^M PLUS⁺

FRAMED 72-CELL MODULE

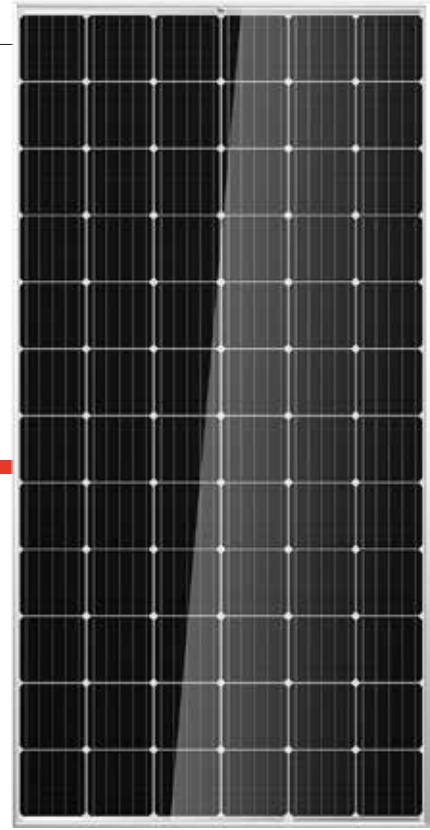

72 CELL
MONOCRYSTALLINE MODULE

340-375W
POWER OUTPUT RANGE


19.3%
MAXIMUM EFFICIENCY

0~+5W
POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading comprehensive solutions provider for solar energy. We believe close cooperation with our partners is critical to success. Trina Solar now distributes its PV products to over 60 countries all over the world. Trina is able to provide exceptional service to each customer in each market and supplement our innovative, reliable products with the backing of Trina as a strong, bankable partner. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

Comprehensive Products And System Certificates

IEC61215/IEC61730/UL1703/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse gases Emissions Verification
 OHSAS 18001: Occupation Health and Safety Management System

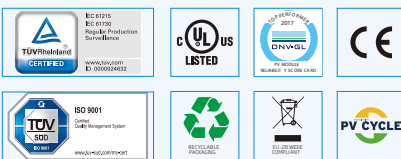

Excellent low light performance on cloudy days, mornings and evenings

- Advanced surface texturing
- Back surface field
- Selective emitter



Maximize limited space with top-end efficiency

- Up to 193 W/m² power density
- Low thermal coefficients for greater energy production at high operating temperatures



Highly reliable due to stringent quality control

- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant
- 100% EL double inspection




Certified to withstand the most challenging environmental conditions

- 2400 Pa wind load
- 5400 Pa snow load
- 35 mm hail stones at 97 km/h


LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty · 25 Year Linear Power Warranty

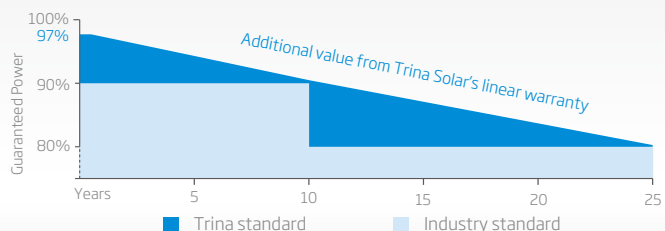


PRODUCTS TSM-DD14A(II) | **POWER RANGE** 340-375W

DIMENSIONS OF PV MODULE(mm)

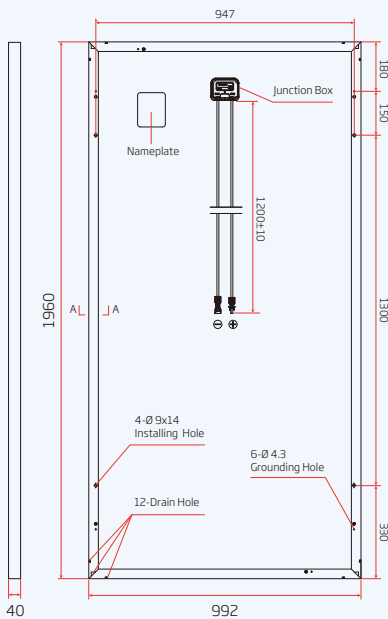


Back View




(A-A)

I-V CURVES OF PV MODULE(365W)

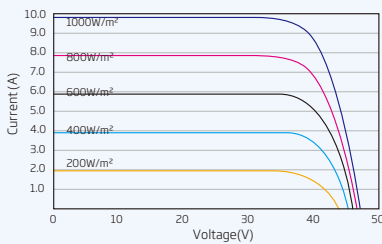

P-V CURVES OF PV MODULE(365W)

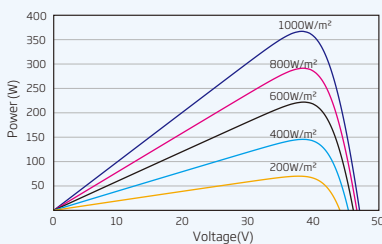

ELECTRICAL DATA (STC)

Peak Power Watts- P_{MAX} (Wp)*	340	345	350	355	360	365	370	375
Power Output Tolerance- P_{MAX} (W)	0 ~ +5							
Maximum Power Voltage- V_{MPP} (V)	38.2	38.5	38.7	38.8	39.0	39.3	39.7	40.0
Maximum Power Current- I_{MPP} (A)	8.90	8.96	9.04	9.14	9.24	9.30	9.33	9.37
Open Circuit Voltage- V_{OC} (V)	46.2	46.7	47.0	47.4	47.7	48.0	48.3	48.5
Short Circuit Current- I_{SC} (A)	9.50	9.55	9.60	9.65	9.70	9.77	9.83	9.88
Module Efficiency η_m (%)	17.5	17.7	18.0	18.3	18.5	18.8	19.0	19.3

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
*Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power- P_{MAX} (Wp)	253	257	261	264	268	272	276	279
Maximum Power Voltage- V_{MPP} (V)	35.4	35.7	35.9	36.0	36.2	36.4	36.8	37.1
Maximum Power Current- I_{MPP} (A)	7.15	7.20	7.26	7.34	7.42	7.47	7.50	7.53
Open Circuit Voltage- V_{OC} (V)	42.9	43.4	43.7	44.1	44.3	44.6	44.9	45.1
Short Circuit Current- I_{SC} (A)	7.67	7.71	7.75	7.79	7.83	7.89	7.94	7.98

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline 156.75 × 156.75 mm (6 inches)
Cell Orientation	72 cells (6 × 12)
Module Dimensions	1960 × 992 × 40 mm (77.2 × 39.1 × 1.57 inches)
Weight	26.0 kg (57.3 lb) with 4.0 mm glass; 22.5 kg (49.6 lb) with 3.2 mm glass
Glass	4.0 mm (0.16 inches) for PERC Mono; 3.2 mm (0.13 inches) for Std Mono, High Transmission, AR Coated Tempered Glass
Backsheet	White
Frame	Silver Anodized Aluminium Alloy
J-Box	IP 67 or IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), 1200 mm (47.2 inches)
Connector	MC4/UTX/TS4/QC4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	44°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.39%/°C
Temperature Coefficient of V_{OC}	-0.29%/°C
Temperature Coefficient of I_{SC}	0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1000V DC (IEC) 1000V DC (UL)
Max Series Fuse Rating	15A (Power ≤350W) 20A (Power ≥355W)

(DO NOT connect Fuse in Combiner Box with two or more strings in parallel connection)

WARRANTY

10 year Product Workmanship Warranty
25 year Linear Power Warranty

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 27 pieces
Modules per 40' container: 648 pieces